

TEKSAN


TEKSAN GPRS MODEM



USER MANUAL

Connection type

- Following establishing Tsm connection, convey (IP) XXX.XXX.XXX.XXX info on device display to relevant staff.
- Use voice Sim Card on Device. Do not use Data Sim Card
- Insert Sim Card before power up device.(Make sure Sim Password disabled and data-Internet services active)
- Make antenna connection of the device.
- Power up device with 12 VDC as instructed
- Power LED light will turn on.
- Signal LED's will light to indicate signal reception strength.
- TX2 and RX2 LED's blinks, this indicates clear communication between modem and processor
- Consult service center if RX2 LED's on but TX2 LED off.
- Network LED indicates device connection to Internet (during active connection)
- SRV LED's indicates server connection to device
- TX1,RX1,ACK LED's indicates communication between device and M-Bus (during server connection)

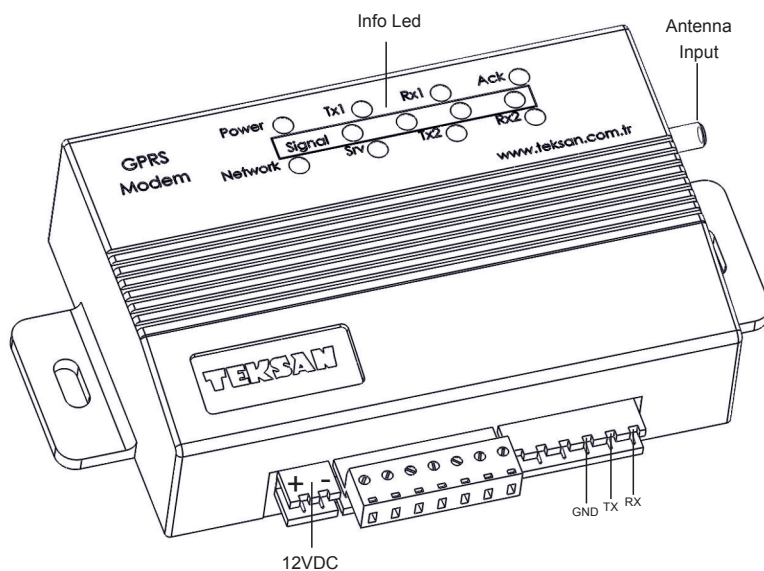

Failures

- If second left LED blinks on Signal LED's, modem card in device either not installed or malfunction. Consult service center
- Check power connection if power LED is off.

Instruction During Transportation And Storage

- Carry device only with its own box. Box protect device from any possible physical damage
- Do not put heavy object on device box. Device might damage
- If the device is dropped, device may not work or permanent damages may occur.
- Ensure protection of device against water and similar fluids.
- Do not pour any liquid or insert any object inside device
- Do not try to open device with undesirable object this might cause electric shock
- Too Cold too hot might cause deformation, shorten life or malfunction of electronic circuits on device

Package content;

- 1x GPRS Modem
- 1x Antenna
- 1x RS232 cable
- 12V Adapter

TEKSAN TEKNOLOJİK ÖLÇÜM SİSTEMLERİ SAN. ve TİC. A.Ş.

Çatalmeşe Mahallesi Reşadiye Caddesi 185. Sokak No: 6 34794

Alemdağ / Çekmeköy / İstanbul / Türkiye

Tel: +90 216 484 40 40 Faks: +90 216 484 42 62

www.teksan.com.tr bilgi@teksan.com.tr