




- ▀ Multi-jet semi-dry type
- ▀ 360°C rotatable cover
- ▀ Display on 5 drums m³ and 4 pointers for litres
- ▀ Optional check valve
- ▀ Measuring range up to R160
- ▀ Optional pulse, M-bu Radio frequency output
- ▀ Forged brass housing
- ▀ Water temperature up to 50°C
- ▀ Glycerin filled register unit

Technical Specification


Nominal diameter	DN	mm	20
Nominal flow rate	Q ₃	m ³ /h	2,5
Maximum flow rate	Q ₄	m ³ /h	3,125
Minimum flow rate	Q ₁	l/h	31,2/25/15,6
Transitional flow rate	Q ₂	l/h	50/40/25
Maximum working pressure	P _{max}	bar	16
Pressure loss (max. Q ₃)	ΔP	bar	0,63
Maximum working temperature	T _{max}	°C	50
Measuring range	Q ₃ /Q ₁	R	80/100/160
Overall length	L	mm	190
Maximum register indication		m ³	99,999
Verification scale interval		l	0,2
Width	B	mm	96
Total height	H	mm	112
Height to pipe axis	h	mm	34
Connection thread of meter	-	-	G1B
Nominal size	DN	mm	20
Pipping dimensions	-	-	G3/4B
Weight	-	kg	1,210
Installation position			H



Dimensions

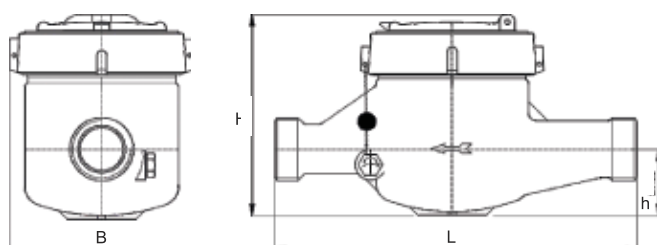

Error Curve

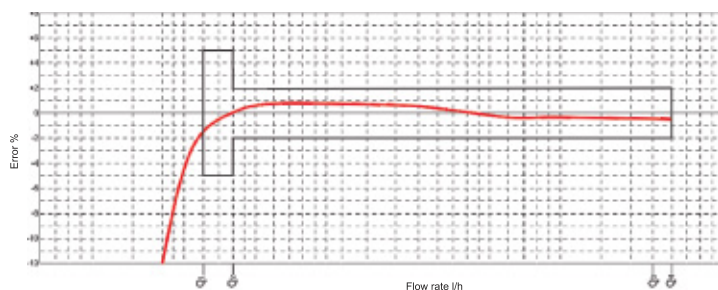

Pressure Loss

