




- ▀ Multi-jet dry type
- ▀ 360°C rotatable cover
- ▀ Display on 5 drums m^3 and 4 pointers for litres
- ▀ Optional check valve
- ▀ Measuring range up to R160
- ▀ Optional pulse, M-bus, Radio frequency output
- ▀ Hermetically sealed register (IP68)
- ▀ Forged brass housing
- ▀ Water temperature up to 50°C

Technical Specification


Nominal diameter	DN	mm	20
Nominal flow rate	Q_3	m^3/h	20
Maximum flow rate	Q_4	m^3/h	2,5
Minimum flow rate	Q_1	l/h	31,5/25/15,6
Transitional flow rate	Q_2	l/h	50/40/25
Maximum working pressure	P_{max}	bar	16
Pressure loss (max. Q_3)	ΔP	bar	0,63
Maximum working temperature	T_{max}	°C	50
Measuring range	Q_3/Q_1	R	80/100/160
Overall length	L	mm	190
Maximum register indication		m^3	99.999
Verification scale interval		l	0,05
Width	B	mm	96
Total height	H	mm	114
Height to pipe axis	h	mm	34
Connection thread of meter	-	-	G1B
Nominal size	DN	mm	20
Pipping dimensions	-	-	G3/4B
Weight	-	kg	1,250
Installation position			H



Dimensions

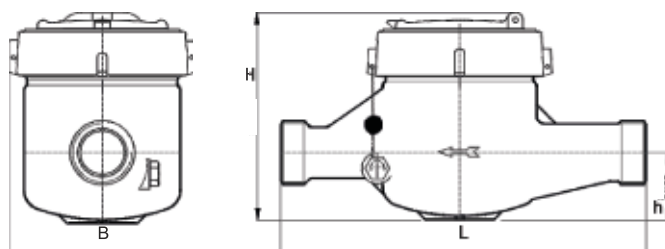

Error Curve

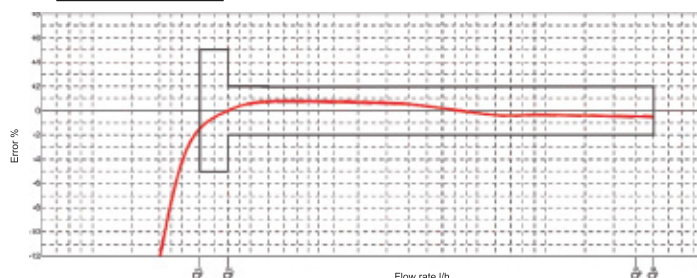

Pressure Loss

