




- Multi-jet wet type
- 360°C rotatable cover
- Display on 5 drums m^3 and 4 pointers for litres
- Optional check valve
- Measuring range up to R160
- MID certificate
- Forged brass housing
- Water temperature up to 50°C

Technical Specification


Nominal diameter	DN	mm	20
Nominal flow rate	Q_3	m^3/h	2,5
Maximum flow rate	Q_4	m^3/h	3,125
Minimum flow rate	Q_1	l/h	31,2/25/15,6
Transitional flow rate	Q_2	l/h	50/40/25
Maximum working pressure	P_{max}	bar	16
Pressure loss $(max. Q_3)$	ΔP	bar	0,63
Maximum working temperature	T_{max}	°C	50
Measuring range	Q_3/Q_1	R	80/100/160
Overall length	L	mm	190
Maximum register indication		m^3	99,999
Verification scale interval		l	0,05
Width	B	mm	96
Total height	H	mm	112
Height to pipe axis	h	mm	34
Connection thread of meter	-	-	G1B
Nominal size	DN	mm	20
Pipping dimensions	-	-	G3/4B
Weight	-	kg	1,170
Installation position			H



Dimensions

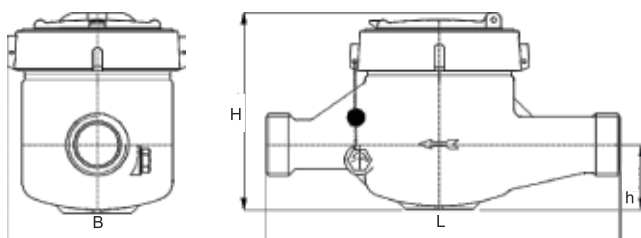

Error Curve

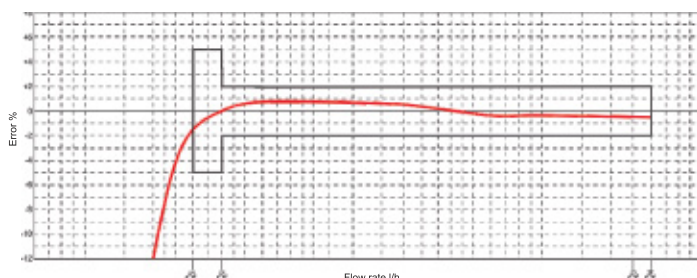

Pressure Loss

