

- Multi-jet dry type
- 360°C rotatable cover
- Display on 8 drums (5 for m³, 3 for litres)
- Optional check valve
- Measuring range up to R100
- Hermetically sealed register (IP68)
- Brass housing
- Water temperature up to 50°C
- Magnetic field protection
- Optional pulse, M-bus, Radio frequency output




Technical Specification


Nominal diameter	DN	mm	15	15	20	20
Nominal flow rate	Q ₃	m ³ /h	2,5	2,5	2,5	2,5
Maximum flow rate	Q ₄	m ³ /h	3,125	3,125	3,125	3,125
Minimum flow rate	Q ₁	l/h	31,2/25/20/15,6	31,2/25/20/15,6	31,2/25/20/15,6	31,2/25/20/15,6
Transitional flow rate	Q ₂	l/h	50/40/32/25	50/40/32/25	50/40/32/25	50/40/32/25
Maximum working pressure	P _{max}	bar	16	16	16	16
Pressure loss (max. Q ₃)	ΔP	bar	0,63	0,63	0,63	0,40
Maximum working temperature	T _{max}	°C	50	50	50	50
Measuring range	Q ₃ /Q ₁	R	80/100/125/160	80/100/125/160	80/100/125/160	80/100/125/160
Overall length	L	mm	110	165	110	190
Maximum register indication		m ³	99.999	99.999	99.999	99.999
Verification scale interval		l	0,05	0,05	0,05	0,05
Width	B	mm	80	80	80	80
Total height	H	mm	90	90	90	90
Height to pipe axis	h	mm	31	31	31	31
Connection thread of meter	-	-	G3/4B	G3/4B	G3/4B	G3/4B
Nominal size	DN	mm	15	15	20	20
Piping dimensions	-	-	G1/2B	G1/2B	G1/2B	G1/2B
Weight	-	kg	0,810	1,000	0,900	1,070
Installation position			H	H	H	H



Dimensions

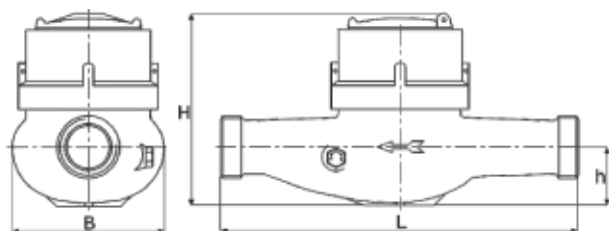

Error Curve

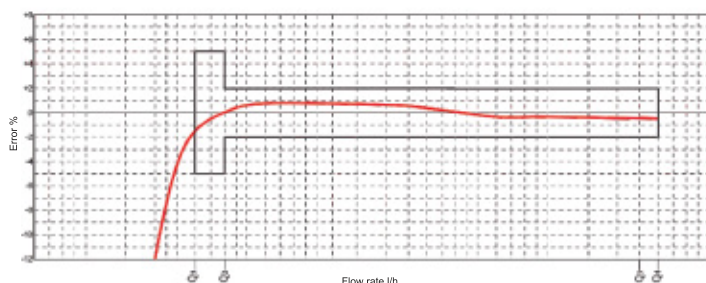

Pressure Loss

